


BR2724



Connector housing with single locking latch
Caja de enchufe con sujeción simple

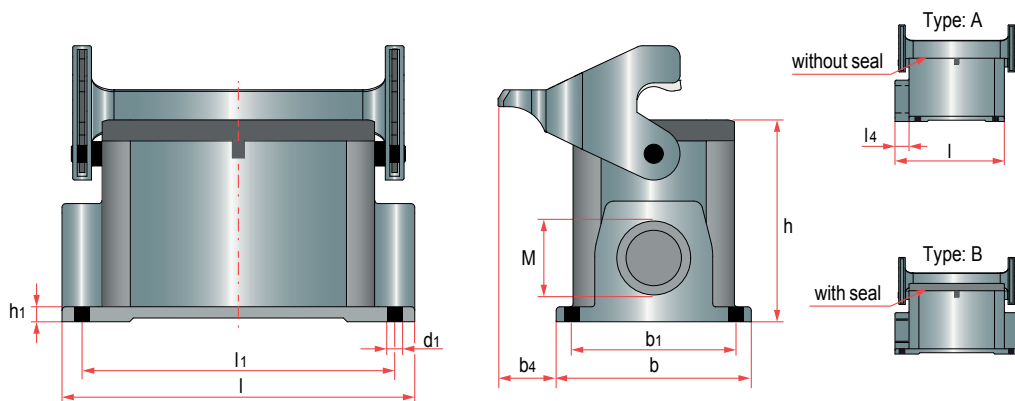

Mat. Powder coated die-cast aluminium. Maximum temperature at work: 125° C.

l	b	l1	b1	h1	d1	l4	b4	d5	M	h	polos	tipo	DESC.
74,5	50	48	40	4	4,5	11	12	M4	1xM25x1,5	52	10	A	BR2724/10A
95		64				15				54			16
94	57	82	45		5,5	-	16	M5		56	16	B	BR2724/10B
117		105				-							BR2724/16B
144		132				-							BR2724/24B

Type of connector BR2711, 2712

