


Black nitrited oxidized stepped ejector pin
 Expulsor nitrurado mechado oxidado
 Wypychacz odsadzany azotowany i oksydowany
 Extrator respigado nitrurado oxidado
 Ejecteur epaulee nitreure baigne oxidized

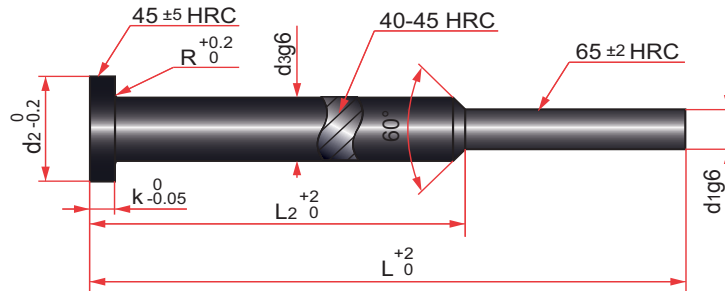

Mat. : 1.2344 DIN 1530 / ISO 8694 - Maximum temperature at work: 550° C.

R	k	d2	d3	L2	d1	L	REF.
0,2	2	4	2	32	0,8	80	CN/0,80x080
						100	CN/0,80x100
						125	CN/0,80x125
						160	CN/0,80x160
						200	CN/0,80x200
				50	0,9	80	CN/0,90x080
						100	CN/0,90x100
						125	CN/0,90x125
						160	CN/0,90x160
						200	CN/0,90x200
				63	1	80	CN/1,00x080
						100	CN/1,00x100
						125	CN/1,00x125
						160	CN/1,00x160
						200	CN/1,00x200
				80	1,1	80	CN/1,10x080
						100	CN/1,10x100
						125	CN/1,10x125
						160	CN/1,10x160
						200	CN/1,10x200
100	1,2	80	CN/1,20x080				
		100	CN/1,20x100				
		125	CN/1,20x125				
		160	CN/1,20x160				
		200	CN/1,20x200				

R	k	d2	d3	L2	d1	L	REF.		
0,2	2	4	2	100	1,2	250	CN/1,20x250		
						32	1,3	80	CN/1,30x080
						100	1,3	100	CN/1,30x100
						125	1,3	125	CN/1,30x125
						160	1,3	160	CN/1,30x160
				50	1,4	80	1,4	200	CN/1,30x200
						250	1,4	250	CN/1,30x250
						32	1,4	80	CN/1,40x080
						100	1,4	100	CN/1,40x100
						125	1,4	125	CN/1,40x125
				63	1,4	160	1,4	160	CN/1,40x160
						200	1,4	200	CN/1,40x200
						250	1,4	250	CN/1,40x250
						32	1,5	80	CN/1,50x080
						100	1,5	100	CN/1,50x100
80	1,5	125	1,5	125	CN/1,50x125				
		160	1,5	160	CN/1,50x160				
		200	1,5	200	CN/1,50x200				
		250	1,5	250	CN/1,50x250				
		32	1,6	80	CN/1,60x080				
100	1,6	100	1,6	100	CN/1,60x100				
		125	1,6	125	CN/1,60x125				
		160	1,6	160	CN/1,60x160				
		200	1,6	200	CN/1,60x200				
		250	1,6	250	CN/1,60x250				
32	1,7	80	1,7	80	CN/1,70x080				

